GE
Lighting

Tetra®

LED Lighting System

Reference Chart **2014**

imagination at work

Tetra® LED Systems

Tetra® miniMAX MS

MiniMax MS (Micro System) was created for channel letters as shallow as 1.5 inch deep and as narrow as ½-inch wide.

Applications — huge performance in small channel letters
Available Colors — white & warm white
Packaging — 100 ft./box

Tetra® miniMAX

Tetra miniMAX delivers brilliant light in channel letters as shallow as 1.5 inch. The patent-pending OptiLens™ promotes a wide viewing angle and superior uniformity in the smallest of channel letters.

Applications — small channel letters
Available Colors — red, green, blue, white, warm white & orange
Packaging — 100 ft./box

Tetra® MAX

Tetra MAX is designed for the easiest possible installation and operation. This LED system is available in a wide selection of colors and provides bright uniform light in medium sized channel letters.

Applications — medium channel letters
Available Colors — red, red-orange, amber, green, blue, white & warm white
Packaging — 100 ft./box

Tetra® PowerMAX

Tetra PowerMAX provides powerful white light in the largest channel letter applications. OptiLens™ allows this lighting system to produce wide uniform surface area coverage across the sign face.

Applications — large channel letters
Available Colors — white & warm white
Packaging — 100 ft./box

Tetra® Contour

Tetra Contour is our two-part neon replacement system that can be easily heated and formed into custom shapes and designs.

Applications — neon replacement and accent lighting
Available Colors — Light Engine: red, red-orange, amber, green, blue, white & warm white
Light Guide: red, orange, yellow, lime green, green, blue & white
Packaging — Tetra Contour light engines: 96 ft./box
Tetra Contour light guides: 96 ft./box

Tetra® Contour LS

Tetra Contour LS is our linear neon replacement system that comes pre-assembled and ready-to-install; perfect for long run border lighting applications.

Applications — border lighting and accent lighting
Available Colors— red, green, blue & white & warm white
Packaging — 96 ft./box

Tetra® miniStrip & Tetra® miniStrip DS

New Tetra miniStrip and miniStrip DS were designed specifically for shallow cabinet signs. Tetra miniStrip is ideal for single-sided signs with a 3 to 6 inch can depth, while Tetra miniStrip DS is perfect for double-sided signs with a 6 to 12 inch can depth.

Applications — shallow cabinet signs
Available Colors — white & warm white
Packaging — Tetra miniStrip: 48 modules per box/Tetra miniStrip DS: 32 modules per box

Tetra® PowerStrip & Tetra® PowerStrip DS

New Tetra PowerStrip significantly reduces maintenance and energy costs by replacing fluorescent lighting in cabinet and pylon signs. This LED system features OptiLens™, a patent-pending optical lens that eliminates striping commonly associated with fluorescent lighting.

Applications — cabinet signs
Available Colors — white & warm white
Packaging — Tetra PowerStrip: 48 modules per box/Tetra PowerStrip DS: 32 modules per box

Tetra® EdgeStrip

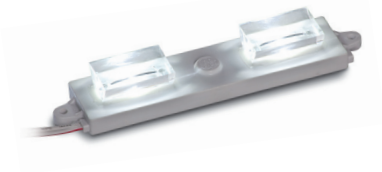

Tetra EdgeStrip is engineered to install easily around the edge of signs with a 3 to 6 inch can depth. Perfect for single or double-sided signs,Tetra EdgeStrip delivers money-saving advantages over T8 fluorescent tubes while producing outstanding visual performance that protects end-user brand image.

Applications — shallow cabinet signs
Available Colors — white & warm white
Packaging — 32 modules per box

LineFit Light LED

LineFit is the incredibly quick and easy way to transform a fluorescent cabinet sign into an efficient LED solution.

Applications — is the fast, simple retrofit for cabinet signs
Available Colors — Sign White, Daylight and Cool White
Packaging — 6/box

Tetra® Product Reference Guide

	Product Line	SKU	LED Color	Wavelength/ Color Temperature	LEDs Per Module	Modules Per Foot	Viewing Angle	Lumens Per Module (Typical)	Lumens Per Foot (Typical)
Channel Letters	**Tetra** miniMAX MS	GEMS71-1	WHITE	7100K	3	2.5	140	36	90
		GEMS50-1	WARM WHITE	5000K	3	2.5	140	36	90
		GEMS41-1	WARM WHITE	4100K	3	2.5	140	28	70
		GEMS32-1	WARM WHITE	3200K	3	2.5	140	28	70
	Tetra miniMAX 0.5" Min. Stroke Width 1.5" (38mm) Min. Depth	GEMM71-2	WHITE	7100K	3	2.5	150	36	90
		GEMM50-2	WARM WHITE	5000K	3	2.5	150	36	90
		GEMM41-2	WARM WHITE	4100K	3	2.5	150	34	85
		GEMM32-2	WARM WHITE	3200K	3	2.5	150	30	75
		GEMMRD-1	RED	625nm	3	2.5	150	11	27
		GEMMBL-1	BLUE	467nm	3	2.5	150	8	19
		GEMMGL-1	GREEN	530nm	3	2.5	150	24	60
		GEMMPO-1	ORANGE	606nm	3	2.5	150	19	48
	Tetra MAX 0.75" Min. Stroke Width 4" (102mm) Min. Depth >12" (304.8mm) Letter Height	GEMX71-2*	WHITE	7100K	3	2	150	52	105
		GEMX50-2*	WARM WHITE	5000K	3	2	150	52	105
		GEMX41-2*	WARM WHITE	4100K	3	2	150	47	95
		GEMX32-2*	WARM WHITE	3200K	3	2	150	43	86
		GEMXRD-1*	RED	625nm	3	2	150	14	27
		GEMXBL-1*	BLUE	467nm	3	2	150	10	20
		GEMXGL-1*	GREEN	530nm	3	2	150	30	60
		GEMXPO-1*	ORANGE	606nm	3	2	150	13	25
		GEMXRC-1*	RED-ORANGE	616nm	3	2	150	12	23
		GEMXYG-1*	AMBER	589nm	3	2	150	16	21
		GEMXH71-2*	WHITE	7100K	3	2	150	82	165
		GEMXH50-2*	WARM WHITE	5000K	3	2	150	82	165
		GEMXH41-2*	WARM WHITE	4100K	3	2	150	75	150
		GEMXH32-2*	WARM WHITE	3200K	3	2	150	68	136
		GEMXHRD-1*	RED	625nm	4	2	150	16	31
	Tetra PowerMAX 1.25" Min. Stroke Width 4" (102mm) Min. Depth >=36" (914.4mm) Letter Height	GEPM71-2*	WHITE	7100K	3	1.5	150	133	200
		GEPM50-2*	WARM WHITE	5000K	3	1.5	150	133	200
		GEPM41-2*	WARM WHITE	4100K	3	1.5	150	120	180
		GEPM32-2*	WARM WHITE	3200K	3	1.5	150	109	164
Border Lighting	**Tetra** Contour Border & Accent Lighting 15mm neon replacement	GEXNRD-1**	RED	625nm			115/330		55
		GEXNRC-1**	RED/ORANGE	618nm			115/330		85
		GEXNYG-1**	AMBER	589nm			115/330		60
		GEXNGL-1**	GREEN	532nm			115/330		120
		GEXNBL-1**	BLUE	467nm			115/330		30
		GEXN32-1**	WARM WHITE	3200K			115/330		130
		GEXN65-1**	WHITE	6500K			115/330		140
	Tetra Contour LS Straight Border Lighting 15mm neon replacement	GEXNLRD-1	RED/RED	625nm			115/330		55
		GEXNLGL-1	GREEN/GREEN	532nm			115/330		120
		GEXNLBL-1	BLUE/BLUE	467nm			115/330		30
		GEXNL65-1	WHITE	6500K			115/330		140
		GEXNL32-1	WARM WHITE	3200K			115/330		130

Warranty	GE offers a limited system warranty of up to five (5) years
System Certifications	UL/cUL Recognized #E219167, UL/cUL Classified #E229508, IP66 rated: separate enclosure required, damp location rated. Product is compliant with material restriction requirements of RoHS.

LED Strip/System Power Consumption Watts/Module** (Typical)	Module Dimension H x L x W (Inches)	Voltage	Maximum Load (FT/Power Supply)
0.38/0.45	0.352 x 1.374 x 0.378	12V	20W: 20ft. (50 Modules), 60W: 60ft. (150 Modules) 180W: 60ft. (150 Modules) per bank / 180ft. (450 Modules) per PS
0.38/0.45	0.352 x 1.374 x 0.378	12V	
0.38/0.45	0.352 x 1.374 x 0.378	12V	
0.38/0.45	0.352 x 1.374 x 0.378	12V	
0.32/0.38	0.31 x 1.89 x 0.47	12V	20W: 22ft. (56 Modules), 60W: 68ft. (170 Modules) 180W: 68ft. (170 Modules) per bank / 204ft. (510 Modules) per PS
0.32/0.38	0.31 x 1.89 x 0.47	12V	
0.32/0.38	0.31 x 1.89 x 0.47	12V	
0.32/0.38	0.31 x 1.89 x 0.47	12V	
0.39/0.47	0.31 x 1.89 x 0.47	12V	20W: 20ft. (50 Modules), 60W: 60ft. (150 Modules) 180W: 60ft. (150 Modules) per bank / 180ft. (450 Modules) per PS
0.39/0.47	0.31 x 1.89 x 0.47	12V	
0.39/0.47	0.31 x 1.89 x 0.47	12V	
0.48/0.59	0.31 x 1.89 x 0.47	12V	20W: 16ft. (40 Modules), 60W: 48ft. (120 Modules), 180W: 48ft. (120 Modules) per bank / 144ft. (360 Modules) per PS
0.46/0.54	0.31 x 0.55 x 2.56	12V	20W: 21ft. (42 Modules), 60W: 64ft. (128 Modules) 180W: 64ft. (128 Modules) per bank / 192ft. (384Modules) per PS
0.46/0.54	0.31 x 0.55 x 2.56	12V	
0.46/0.54	0.31 x 0.55 x 2.56	12V	
0.46/0.54	0.31 x 0.55 x 2.56	12V	
0.48/0.59	0.31 x 0.55 x 2.56	12V	20W: 20ft. (40 Modules), 60W: 60ft. (120 Modules) 180W: 60ft. (120 Modules) per bank / 180ft. (360 Modules) per PS
0.48/0.59	0.31 x 0.55 x 2.56	12V	
0.48/0.59	0.31 x 0.55 x 2.56	12V	
0.36/0.44	0.31 x 0.55 x 2.56	12V	20W: 26ft. (52 Modules), 60W: 80ft. (160 Modules), 180W: 80ft. (160 Modules) per bank / 240ft. (480 Modules) per PS
0.29/0.36	0.31 x 0.55 x 2.56	12V	20W: 33ft. (66 Modules), 60W: 100ft. (200 Modules), 180W: 100ft. (200 Modules) per bank / 300ft. (600 Modules) per PS
0.54/0.66	0.31 x 0.55 x 2.56	12V	20W: 17ft. (34 Modules), 60W: 53ft. (106 Modules), 180W: 53ft. (106 Modules) per bank / 159ft. (318 Modules) per PS
0.72/0.85	0.31 x 0.55 x 2.56	12V	20W: 13ft. (26 Modules), 60W: 40ft. (80 Modules) 180W: 40ft. (80 Modules) per bank / 120ft. (240 Modules) per PS
0.72/0.85	0.31 x 0.55 x 2.56	12V	
0.72/0.86	0.31 x 0.55 x 2.56	12V	
0.72/0.86	0.31 x 0.55 x 2.56	12V	
0.41/0.49	0.24 x 0.55 x 3.06	12V	20W: 23ft. (46 Modules), 60W: 71ft. (142 Modules), 180W: 71ft. (142 Modules) per bank / 213ft. (426 Modules) per PS
1.32/1.50	0.31 x 0.71 x 3.94	12V	20W: 9ft. (14 Modules), 60W: 28ft. (42 Modules) 180W: 28ft. (42 Modules) per bank/84ft. (126 Modules) per PS
1.32/1.50	0.31 x 0.71 x 3.94	12V	
1.32/1.50	0.31 x 0.71 x 3.94	12V	
1.32/1.50	0.31 x 0.71 x 3.94	12V	
1.52/1.79	0.48 x 0.40 x 16.0	24V	20W: 12ft, 80W: 50ft, 100W: 59ft, 180W: 55ft per bank
2.27/2.67	0.48 x 0.40 x 16.0	24V	20W: 8ft, 80W:33ft, 100W: 40ft, 180W: 37ft per bank
2.27/2.67	0.48 x 0.40 x 16.0	24V	
1.52/1.79	0.48 x 0.40 x 16.0	24V	20W: 12ft, 80W: 50ft, 100W: 59ft, 180W: 55ft per bank
1.52/1.79	0.48 x 0.40 x 16.0	24V	
3.17/3.73	0.48 x 0.40 x 16.0	24V	20W: 6ft. (216 LEDs), 80W: 24ft. (864 LEDs), 100W: 29ft. (1044 LEDs), 180W: 27ft. (972 LEDs) per bank /54ft. (1944 LEDs) per PS
3.17/3.73	0.48 x 0.40 x 16.0	24V	
1.30/1.53	0.48 x 0.40 x 8.0	24V	20W: 14ft, 80W: 58ft, 100W: 69ft, 180W: 65ft. per bank
1.73/2.03	0.48 x 0.40 x 8.0	24V	20W: 11ft, 80W: 44ft, 100W: 52ft, **180W:** 48ft per bank
1.73/2.03	0.48 x 0.40 x 8.0	24V	
3.17/3.73	0.48 x 0.40 x 8.0	24V	20W: 6ft. (216 LEDs), 80W: 24ft. (864 LEDs), 100W: 29ft. (1044 LEDs), 180W: 27ft. (972 LEDs) per bank /54ft. (1944 LEDs) per PS
3.17/3.73	0.48 x 0.40 x 8.0	24V	

* Max and PowerMax products can be deposited in the trash
**Tetra Contour power consumption is measured by the foot

Tetra® Product Reference Guide

Cabinet Signs

Product Line	SKU	LED Color	Wavelength/ Color Temperature	LEDs Per Module	Modules Per Foot	Viewing Angle	Lumens Per Module (Typical)	Lumens Per Foot (Typical)
Tetra miniStrip 3" (76mm) Min. Depth	GEWHBSP3	WHITE	7100K	3	1	140	96	96
	GEWWBSP3-50K	WARM WHITE	5000K	3	1	140	96	96
	GEWWBSP3-41K	WARM WHITE	4100K	3	1	140	72	96
	GEWWBSP3	WARM WHITE	3200K	3	1	140	72	96
	GEBSH71-1	WHITE	7100K	3	1	140	120	110
	GEBSH50-1	WARM WHITE	5000K	3	1	140	120	110
	GEBSH41-1	WARM WHITE	4100K	3	1	140	90	90
	GEBSH32-1	WARM WHITE	3200K	3	1	140	90	90
Tetra miniStrip DS 6" (152mm) Min. Depth	GEWHBDP6	WHITE	7100K	6	1	140	192	192
	GEWWBDP6-50K	WARM WHITE	5000K	6	1	140	192	192
	GEWWBDP6-41K	WARM WHITE	4100K	6	1	140	144	192
	GEWWBDP6	WARM WHITE	3200K	6	1	140	144	192
	GEBDH71-1	WHITE	7100K	6	1	140	240	220
	GEBDH50-1	WARM WHITE	5000K	6	1	140	240	220
	GEBDH41-1	WARM WHITE	4100K	6	1	140	180	180
	GEBDH32-1	WARM WHITE	3200K	6	1	140	180	180
Tetra PowerStrip 5" (127mm) Min. Depth	GESS71-1	WHITE	7100K	5	1	140	280	280
	GESS50-1	WARM WHITE	5000K	5	1	140	280	280
	GESS41-1	WARM WHITE	4100K	5	1	140	210	210
	GESS32-1	WARM WHITE	3200K	5	1	140	210	210
	GESSH71-1	WHITE	7100K	8	1	140	360	360
	GESSH50-1	WARM WHITE	5000K	8	1	140	360	360
	GESSH41-1	WARM WHITE	4100K	8	1	140	260	260
	GESSH32-1	WARM WHITE	3200K	8	1	140	260	260
Tetra PowerStrip DS 5" (127mm) Min. Depth From Face	GEDS71-1	WHITE	7100K	10	1	140	560	560
	GEDS50-1	WARM WHITE	5000K	10	1	140	560	560
	GEDS41-1	WARM WHITE	4100K	10	1	140	420	420
	GESDS32-1	WARM WHITE	3200K	10	1	140	420	420
	GEDSH71-1	WHITE	7100K	16	1	140	720	720
	GEDSH50-1	WARM WHITE	5000K	16	1	140	720	720
	GEDSH41-1	WARM WHITE	4100K	16	1	140	520	520
	GEDSH32-1	WARM WHITE	3200K	16	1	140	520	520
Tetra EdgeStrip 3" (76mm) Min. Depth	GEWHBIP2	WHITE	7100K	2	1.5	23 x 100	200	200
	GEWWBIP2-50K	WARM WHITE	5000K	2	1.5	23 x 100	200	200
	GEWWBIP2-41K	WARM WHITE	4100K	2	1.5	23 x 100	150	150
	GEWWBIP2	WARM WHITE	3200K	2	1.5	23 x 100	150	150
	GEBIH71-1	WHITE	7100K	2	1.5	23 x 100	410	410
	GEBIH50-1	WARM WHITE	5000K	2	1.5	23 x 100	410	410
	GEBIH41-1	WARM WHITE	4100K	2	1.5	23 x 100	330	330
	GEBIH32-1	WARM WHITE	3200K	2	1.5	23 x 100	330	330

Warranty	GE offers a limited system warranty of up to five (5) years
System Certifications	UL/cUL Recognized #E219167, UL/cUL Classified #E229508, IP66 rated: separate enclosure required, damp location rated. Product is compliant with material restriction requirements of RoHS.

LED Strip/System Power Consumption Watts/Module** (Typical)	Module Dimension H x W x L (Inches)	Voltage	Maximum Load (FT/Power Supply)
1.10/1.29	0.51 x 1.10 x 7.87	12V	20W: 17ft. (17 Modules), 60W: 53ft. (53 Modules) 180W: 53ft. (53 Modules) per bank /159ft. (159 Modules) per PS
1.10/1.29	0.51 x 1.10 x 7.87	12V	
1.10/1.29	0.51 x 1.10 x 7.87	12V	
1.10/1.29	0.51 x 1.10 x 7.87	12V	
1.49/1.75	0.51 x 1.10 x 7.87	12V	20W: 12ft. (12 Modules), 60W: 38ft. (38 Modules) 180W: 38ft. (38 Modules) per bank /114ft. (114 Modules) per PS
1.49/1.75	0.51 x 1.10 x 7.87	12V	
1.49/1.75	0.51 x 1.10 x 7.87	12V	
1.49/1.75	0.51 x 1.10 x 7.87	12V	
2.20/2.59	0.59 x 1.10 x 7.87	24V	20W: 8ft. (8 Modules), 80W: 31ft. (31 Modules), 100W: 39ft. (39 Modules) 180W: 35ft. (35 Modules) per bank /70ft. (70 Modules) per PS
2.20/2.59	0.59 x 1.10 x 7.87	24V	
2.20/2.59	0.59 x 1.10 x 7.87	24V	
2.20/2.59	0.59 x 1.10 x 7.87	24V	
2.98/3.50	0.59 x 1.10 x 7.87	24V	20W: 6ft. (6 Modules), 80W: 24ft. (24 Modules), 100W: 30ft. (30 Modules) 180W: 27ft. (27 Modules) per bank /54ft. (54 Modules) per PS
2.98/3.50	0.59 x 1.10 x 7.87	24V	
2.98/3.50	0.59 x 1.10 x 7.87	24V	
2.98/3.50	0.59 x 1.10 x 7.87	24V	
2.4/2.82	0.45 x 1.14 x 9.20	12V	20W: 6ft. (6Modules), 60W: 20ft. (20 Modules) 180W: 20.0ft. (20 Modules) per bank / 60ft. (60 Modules) per PS
2.4/2.82	0.45 x 1.14 x 9.20	12V	
2.4/2.82	0.45 x 1.14 x 9.20	12V	
2.4/2.82	0.45 x 1.14 x 9.20	12V	
3.63/4.15	0.47 x 1.12 x 9.92	12V	20W: 5ft. (5 Modules), 60W: 16ft. (16 Modules) 180W: 16ft. (16 Modules) per bank / 48ft. (48 Modules) per PS
3.63/4.15	0.47 x 1.12 x 9.92	12V	
3.63/4.15	0.47 x 1.12 x 9.92	12V	
3.63/4.15	0.47 x 1.12 x 9.92	12V	
4.8/5.64	0.45 x 1.34 x 9.20	24V	20W: 3ft. (3 Modules), 80W: 14ft. (14 Modules) 100W: 16ft. (16 Modules), 180W: 15ft. (15 Modules) per bank / 30ft. (30 Modules) per PS
4.8/5.64	0.45 x 1.34 x 9.20	24V	
4.8/5.64	0.45 x 1.34 x 9.20	24V	
4.8/5.64	0.45 x 1.34 x 9.20	24V	
6.55/7.14	0.55 x 1.32 x 8.98	24V	20W: 3ft. (3 Modules), 80W: 12ft. (12 Modules) 100W: 13ft. (13 Modules), 180W: 13ft. (13 Modules) per bank /26ft. (26 Modules) per PS
6.55/7.14	0.55 x 1.32 x 8.98	24V	
6.55/7.14	0.55 x 1.32 x 8.98	24V	
6.55/7.14	0.55 x 1.32 x 8.98	24V	
2.40/2.74	0.83 x 1.30 x 5.91	24V	20W: 4.7ft. (7 Modules), 80W: 20ft. (30 Modules) 100W: 24ft. (36 Modules), 180W: 22ft. (33 Modules) per bank / 44ft. (66 Modules) per PS
2.40/2.74	0.83 x 1.30 x 5.91	24V	
2.40/2.74	0.83 x 1.30 x 5.91	24V	
2.40/2.74	0.83 x 1.30 x 5.91	24V	
5.40/6.17	0.87 x 1.69 x 5.91	24V	20W: 2ft. (3 Modules), 80W: 9.3ft. (14 Modules) 100W: 11.3ft. (17 Modules), 180W: 10.7ft. (16 Modules) per bank / 21.4ft. (32 Modules) per PS
5.40/6.17	0.87 x 1.69 x 5.91	24V	
5.40/6.17	0.87 x 1.69 x 5.91	24V	
5.40/6.17	0.87 x 1.69 x 5.91	24V	

Tetra® Product Reference Guide

LineFit Light LED

Fluorescent Replacements

Product	SKU	LED Color	Wavelength/ Color Temperature	LEDs Per Module	Viewing Angle	Lumens Per Module (Typical)	Lumens Per Foot (Typical)	LED Strip/System Power Consumption Watts/Module** (Typical)	Module Dimension (Inches) H x W x L	Voltage	Maximum Load (FT/Supply
95166	GEF18T12SGNHOLED	Daylight	6500K	34	140	893	595	7.2/8.5	0.95 x 1.8 x 15.85	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94472	GEF24T12SGNHOLED	Daylight	6500K	56	140	1470	735	11.5/13.5	0.95 x 1.8 x 21.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95167	GEF30T12SGNHOLED	Daylight	6500K	68	140	1786	714	14.4/16.9	0.95 x 1.8 x 27.84	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94473	GEF36T12SGNHOLED	Daylight	6500K	84	140	2205	735	17.3/20.4	0.95 x 1.8 x 33.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95168	GEF42T12SGNHOLED	Daylight	6500K	96	140	2521	720	20.2/23.8	0.95 x 1.8 x 39.83	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94474	GEF48T12SGNHOLED	Daylight	6500K	112	140	2940	735	23/27.1	0.95 x 1.8 x 45.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95169	GEF60T12SGNHOLED	Daylight	6500K	140	140	3675	735	28.8/33.9	0.95 x 1.8 x 57.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94475	GEF64T12SGNHOLED	Daylight	6500K	146	140	3833	719	30.2/35.5	0.95 x 1.8 x 61.83	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95170	GEF72T12SGNHOLED	Daylight	6500K	168	140	4410	735	34.6/40.7	0.95 x 1.8 x 69.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95171	GEF84T12SGNHOLED	Daylight	6500K	196	140	5145	735	40.3/47.4	0.95 x 1.8 x 81.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94476	GEF96T12SGNHOLED	Daylight	6500K	224	140	5880	735	46.1/54.2	0.95 x 1.8 x 93.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95160	GEF18T12DHOLED	Sign White	5400K	34	140	893	595	7.2/8.5	0.95 x 1.8 x 15.85	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94465	GEF24T12DHOLED	Sign White	5400K	56	140	1470	735	11.5/13.5	0.95 x 1.8 x 21.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95161	GEF30T12DHOLED	Sign White	5400K	68	140	1786	714	14.4/16.9	0.95 x 1.8 x 27.84	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94466	GEF36T12DHOLED	Sign White	5400K	84	140	2205	735	17.3/20.4	0.95 x 1.8 x 33.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95162	GEF42T12DHOLED	Sign White	5400K	96	140	2521	720	20.2/23.8	0.95 x 1.8 x 39.83	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94467	GEF48T12DHOLED	Sign White	5400K	112	140	2940	735	23/27.1	0.95 x 1.8 x 45.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95163	GEF60T12DHOLED	Sign White	5400K	140	140	3675	735	28.8/33.9	0.95 x 1.8 x 57.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94468	GEF64T12DHOLED	Sign White	5400K	146	140	3833	719	30.2/35.5	0.95 x 1.8 x 61.83	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95164	GEF72T12DHOLED	Sign White	5400K	168	140	4410	735	34.6/40.7	0.95 x 1.8 x 69.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95165	GEF84T12DHOLED	Sign White	5400K	196	140	5145	735	40.3/47.4	0.95 x 1.8 x 81.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94469	GEF96T12DHOLED	Sign White	5400K	224	140	5880	735	46.1/54.2	0.95 x 1.8 x 93.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95172	GEF18T12CWHOLED	Cool White	4100K	34	140	834	556	7.2/8.5	0.95 x 1.8 x 15.85	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94479	GEF24T12CWHOLED	Cool White	4100K	56	140	1374	687	11.5/13.5	0.95 x 1.8 x 21.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95173	GEF30T12CWHOLED	Cool White	4100K	68	140	1668	667	14.4/16.9	0.95 x 1.8 x 27.84	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94480	GEF36T12CWHOLED	Cool White	4100K	84	140	2061	687	17.3/20.4	0.95 x 1.8 x 33.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95174	GEF42T12CWHOLED	Cool White	4100K	96	140	2355	673	20.2/23.8	0.95 x 1.8 x 39.83	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94481	GEF48T12CWHOLED	Cool White	4100K	112	140	2748	687	23/27.1	0.95 x 1.8 x 45.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95175	GEF60T12CWHOLED	Cool White	4100K	140	140	3435	687	28.8/33.9	0.95 x 1.8 x 57.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94482	GEF64T12CWHOLED	Cool White	4100K	146	140	3582	672	30.2/35.5	0.95 x 1.8 x 61.83	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95176	GEF72T12CWHOLED	Cool White	4100K	168	140	4122	687	34.6/40.7	0.95 x 1.8 x 69.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
95177	GEF84T12CWHOLED	Cool White	4100K	196	140	4809	687	40.3/47.4	0.95 x 1.8 x 81.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS
94483	GEF96T12CWHOLED	Cool White	4100K	224	140	5496	687	46.1/54.2	0.95 x 1.8 x 93.81	24V	80W: 12ft., 100W: 16ft., 180W: 14ft. per bank /28ft. per PS

Power Supply Loading

Product Code	Description	Long Description	Ft per PS
94485	GEPS24-100U-GL	Power Supply (24VDC/96W), Input Voltage: 108-305VAC: Damp Rated; Self-Contained, Remote or Raceway; 1 Output Bank; Class 2	16'
94486	GEPS24-100U-NA	Power Supply (24VDC/96W), Input Voltage: 108-305VAC: Damp Rated; Self-Contained, Remote or Raceway; 1 Output Bank; Class 2	16'
94487	GEPS24-180U	Power Supply (24VDC/180W), Input Voltage: 90-305VAC: Damp Rated; Self-Contained, Remote or Raceway; 2 Output Banks of 900W; Class 2	14'
94488	GEPS24D-80U	0-10V Dimminig Power Supply (24VDC/80W), Input Voltage: 90-305VAC: Damp Rated; Self-Contained, Remote or Raceway; 1 Output Bank; Class 2	12'
94489	GEPS24W-80	Power Supply (24VDC/80W), Input Voltage: 90-264VAC: Wet Location; 1 Output Bank; Class 2	12'

Warranty	GE offers a limited system warranty of up to five (5) years
System Certifications	UL Recognized #E219167, UL Classified #E229508, CSA Approved, #216319, CE, C-tick, RoHS

GE Lighting • 1-888-MY-GE-LED (1-888-69-43-533) • www.gelighting.com

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. Tetra is a trademark of GE Lighting Solutions, LLC. The GE brand and logo are trademarks of the General Electric Company.
© 2014 GE Lighting Solutions, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.